


Franklin Site Improvements Fall/Winter 2017

Paving:

- Add Basketball and Volleyball equipment, sleeves, poles and backstops per plan
- Remove concrete and track, reinstall concrete and replace track at drive gate
- Add AC concrete at near transformer and as shown on plan
- Repair cracks in asphalt larger than ¼ inch
- Install and remove and reinstall _____ benches
- Slurry and stripe per plan
- Place _____ stepping stones

Fencing:

- Alter fence at Transformer
- Add fence at bungalows – 2 locations to match adjacent existing fencing
- Move WI and add CL fence at pedestrian entrance by new building to match adjacent existing fencing
- Add white vinyl picket fence at old kindergarten planters 3' high and +/- 350 lineal foot by Vinyl Fence Wholesaler or equal with dog eared tops

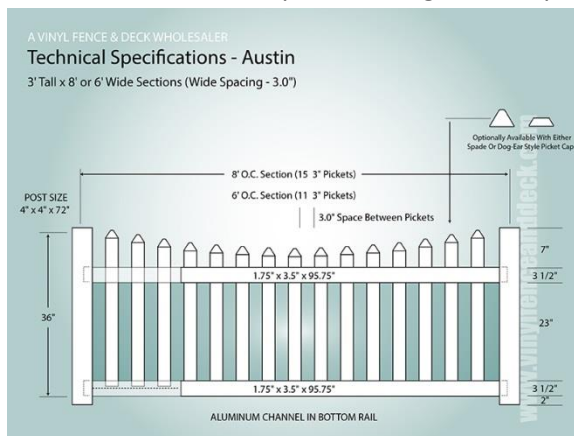

- Replace top rail and adjust fence at old kindergarten
- Add black screen to cover conex boxes and bungalow along Winchester

Conex Boxes:

- Relocate 1 60' and 2 40' Conex Containers
- Unload and reload boxes as needed to avoid damage to contents and provide for the safe movement of the containers